PREMIUM ACCESSORY MOUNT with PERCH MOUNT 1679

PARTS INCLUDED

- 1 Accessory Mounting Plate—Black
- 1 Perch Mount—Chrome
- 1 Perch Mount Kit
  - 2 1/4-20 x 2" Button Socket Cap Screws
  - 2 1/4-20 x 2-1/4" Button Socket Cap Screws
  - 2 M6 x 1.0 x 55mm Button Socket Cap Screws
  - 2 Washers
  - 2 Spacers
- 1 Universal Handlebar Accessory Mount Kit
  - 4 #8-32 X 3/4" Phillips Head Pan Screws
  - 4 #8-32 Nylock Nuts
  - 8 #8 Flat Washers
  - 4 6" Black Nylon Cable Ties
  - 1 Anti-Seize Packet
- 1 Hardware Kit
  - 2 Shim Washers
  - 1 5/16" Split Lock Washer
  - 1 Thumb Nut
- 1 Installation Instructions

Please note that all hardware included may not be used for installation!

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

ATTENTION! **This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.**

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

TOOLS SUGGESTED

Phillips Screwdriver, Set of Combination Wrenches, Set of Hex Wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

STEP 1 Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition.

CAUTION! Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

-cont.-

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breech of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Küryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.
- Küryakyn makes no warranty of any kind in regard to other manufacturer¹s products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Küryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Küryakyn, P.O. Box 339, Somerset, WI 54025.
Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.

STEP 2 Place a clean, soft blanket over the gas tank to protect the paint.

STEP 3 Select either the clutch or brake perch for mounting the arm. The arm will usually point towards the center of the bike. Remove the bottom screw securing the clutch or brake perch halves as shown in PIC 1; this will not be used again.

PIC 1

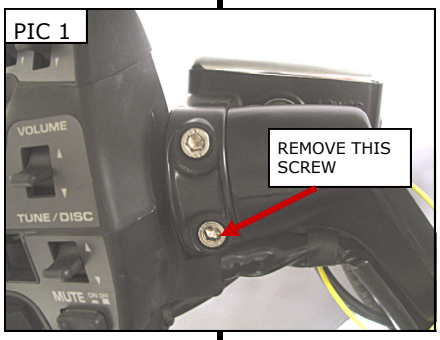

STEP 4 Identify the correct screw, either the metric or standard, by comparing threads on the included screws to the threads from the screws that were removed. The 1/4”-20 x 2-1/4” screws are generally used on older H-D motorcycles, the 1/4”-20 X 2” screws on newer Harleys and the M6 X 1.0 X 55mm on Metric bikes.

ATTENTION! **Use the supplied anti-seize for fasteners; this will prevent galling and make future removal of fasteners easier.**

STEP 5 As shown in PIC 2, place the washer over the screw, then insert through the perch mount arm and place the spacer over the screw then add a dab of anti-seize to the screw end.

STEP 6 As shown in PIC 3, place the arm, screw, washer and spacer on the perch and start the screw, finger tighten the screw.

PIC 2

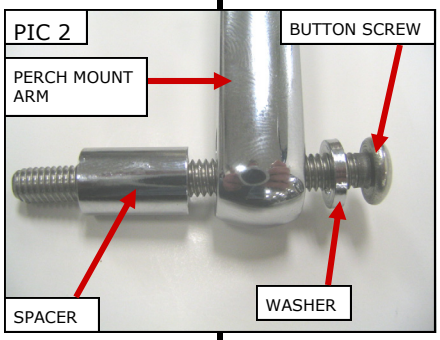

STEP 7 Remove the upper screw securing the perch mounting halves; it will not be used again. PIC 3

STEP 8 Rotate the arm up into position and install the screw, washer, and spacer, while using a dab of anti-seize as in STEP 5. PIC 3

STEP 9 Tighten both of the screws securely.

ATTENTION! **Use the supplied anti-seize for any chrome-to-chrome fasteners; this will prevent galling and make future removal of fasteners easier.**

PIC 3

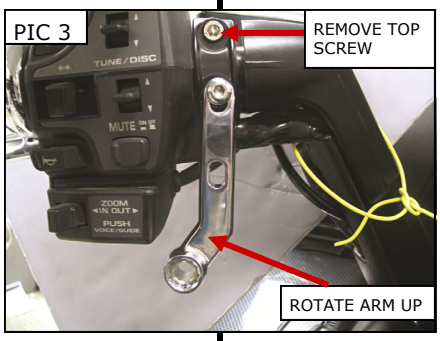

STEP 10 Install the Accessory Mount Plate to the perch mount by inserting the metal shaft through the hole in the perch mount. The hex flats on the metal shaft will line up with the hex flats in the hole. PIC 4 Secure the Accessory Mount Plate with the included 1/4” flat washer, then the 1/4” lock washer, then the Thumb nut. PIC 6 Tighten securely.

STEP 11 Turn the handlebars in both directions to their full stop position and ensure that there is clearance between the mounting plate/accessory and the gas tank, dash and other accessories.

PIC 4

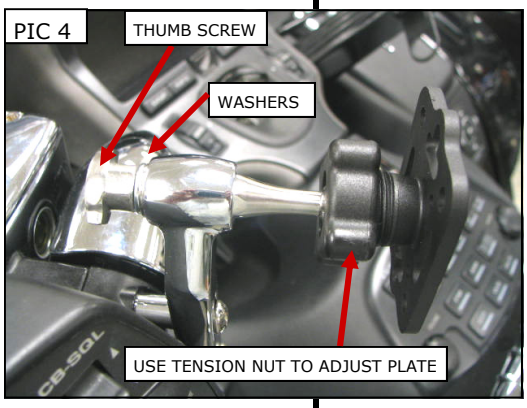

WARNING! ENSURE THAT THERE IS CLEARANCE AT ALL POINTS WHEN THE HANDLEBARS ARE TURNED, INSUFFICIENT CLEARANCE MAY CAUSE DAMAGE TO THE MOTORCYCLE OR CAN CAUSE LOSS OF CONTROL THAT COULD RESULT IN SEVERE INJURY OR DEATH.

-cont.-

ATTENTION! **It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.**

WARNING! TO PREVENT POSSIBLE LOSS OF CONTROL, WHICH COULD RESULT IN A POSSIBLE INJURY OR DEATH, WE DO NOT RECOMMEND REMOVING, REPLACING OR ADJUSTING THE DEVICE ON THE ACCESSORY MOUNT PLATE WHILE RIDING THE MOTORCYCLE .

USING THE ACCESSORY MOUNT PLATE

STEP 1 The Accessory Mount Plate has a variety of slots and holes to allow you to mount many different mobile device holders. PIC 5 Use the included #8 screws, washers and lock nuts to secure the device holder (sold separately) to the Accessory Mount Plate.

A—Standard AMPS pattern
B—Kuryakyn Tech-Connect pattern and Ram Mount pattern
C—Kuryakyn Accessory Pouches pattern

PIC 5

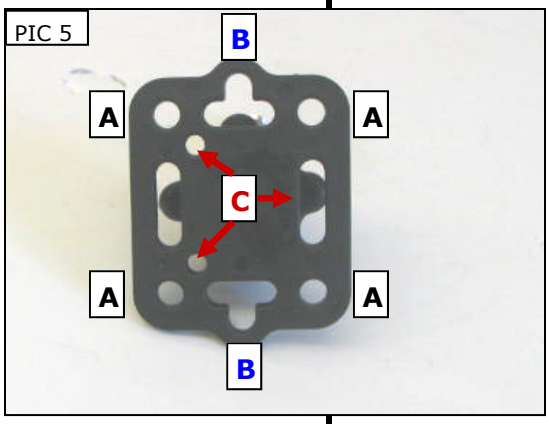

STEP 2 To remove the Accessory Mount Plate from the bike for storage, simply remove the Thumb Nut and washers from the Accessory Mount Plate and remove the plate from the mount. PIC 6

STEP 3 To replace the Accessory Mount Plate on the Perch Mount, insert the metal shaft through the hole in the perch mount. The hex flats on the metal shaft will line up with the hex flats in the hole. PIC 4 Secure the Accessory Mount Plate with the included 1/4" flat washer, then the 1/4" lock washer, then the Thumb nut. PIC 4 Tighten securely.

STEP 4 To adjust the angle of the Accessory Mount Plate, loosen the tensioning nut, adjust the Accessory Mount Plate to the desired position and tighten the tension nut. PIC 4 The tension nut will allow you to keep the Accessory Mount Plate in the same position or, with a little less tension, allow you to move the Accessory Mount Plate on the swivel ball.

PIC 6

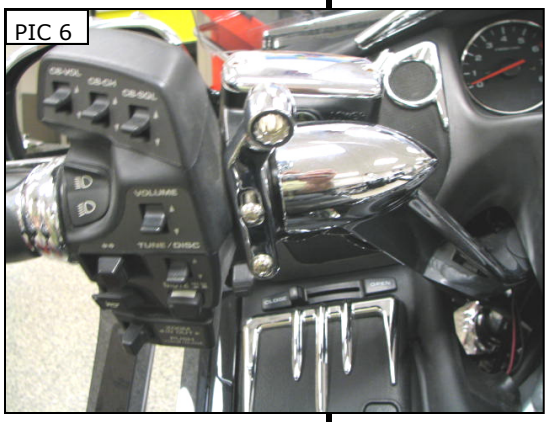

CAUTION! Kuryakyn is not responsible for items that may be stolen or damaged in relation to the use of this product.

CAUTION! Ensure that the Mobile Device is secure on the Accessory Mount Plate. Kuryakyn is not responsible for any Device that is damaged from use on this Mount Plate or from the Mount Plate not being properly secured to the motorcycle.

CAUTION! Motorcycling can be done in a harsh environment. Make sure your Mobile Device is appropriate for this application.

WARNING! DO NOT ATTEMPT TO OPERATE OR REMOVE THE MOBILE DEVICE FROM THE MOUNT PLATE WHILE OPERATING THE MOTORCYCLE.

ATTENTION! **It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Küryakyn will not issue a warranty on components lost due to improper installation. Periodic maintenance may be required.**