Part No. 2321-0280

MEB8917 REVISION 0

Mounting Kit, black
Sportshield
Metric narrow

Aluminum parts are electrocoated (E-coated) for durability and weather resistance.

Before assembly, read Warnings inside

WARNING

1. During installation, make sure that the windshield and hardware do not interfere with any cables or wiring when the forks are turned all the way in either direction. Also make sure , through the full range of adjustment, that the windshield and hardware do not hit the gas tank.
2. This is a detachable windshield, ALWAYS make sure the locking mechanism is fully engaged after installing the windshield.
3. The improper installation of this kit and related components could result in serious injury or death.

CAUTION

1. Memphis Shades windshields are made from Lucite® acrylic, and will last for years with proper care. Clean your windshield with plenty of soapy water (mild dish-washing liquid is best) and a soft cotton cloth. Use your bare hands to feel and dislodge bugs, or cover with a wet, soapy towel and let it soak. Don't use paper towels and scrape with anything. Small scratches can be re-moved with NOVUS #2.
2. Never use any glass cleaning products, petroleum based chemicals, or cleaning agents with ammonia, bleach or any other harsh chemicals. This includes (but not limited to) RainX, brake fluid, acetone, paint thinner, benzene and gasoline. "If it hurts your nose, it will hurt the plastic."
3. Glass cleansing agents will cause severe damage to your windshield, and will void your warranty.
   For care and cleaning we recommend using **Memphis Shades All Kleer**, a unique cleaner/polish, bug remover and rain repellant that leaves a super slick surface that makes the next cleaning even easier.
4. At certain times of the day the Sunlight can reflect off the curvature of a windshield and cause extreme heat build-up on motorcycle instruments and instrument panel. Take care when parking. Park facing the sun, place an opaque object over the instruments or adjust the windshield to avoid reflections.

1. Kit Contents

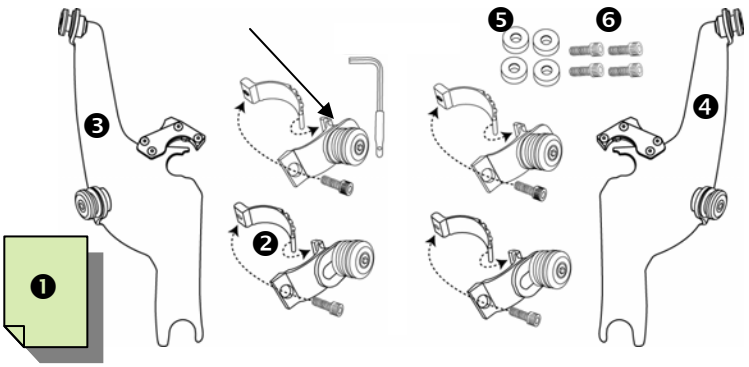

Ref	Code	Description	Qty
❶	I8917B	Mounting Instructions	1
❷	S1166EB	Clamp assembly, black	4
❸	M1120EB	Throttle side plate assembly, black	1
❹	M1119EB	Clutch side plate assembly, black	1
❺	R333	Spacer	4
❻	R331	Socket head cap screw (1/4"-20 x 7/8")	4

2. Mounting Instructions

No additional tools required for this kit.
1. **Cover gas tank and front fender with a towel to avoid damage during installation.**
2. Install the windshield mounting plates onto the windshield, using the bolts that are pre-assembled on the mounting plates.
The Santoprene grommets should be inserted through the holes in the windshield so that the flat round part of the grommet lies flat on each side of the plastic. *The tabs point in towards the headlight when installed correctly. (*Fig 1)
3. Loosely install the four Fork Clamps on the forks, approxi-mately 2" apart. (Fig 2)
4. Start with Fork Clamp Bushing adjusted to rear of slot (Fig 3) Then adjust as needed and check for clearance. (See warning above.)
5. Slip the windshield mounting plates and windshield onto the fork clamps, (Fig 4) and secure the left and right side locking mechanism
6. Adjust the height, angle and alignment of the windshield and tighten ***ALL*** bolts.

Continued overleaf…….

Memphis Shades warrants all product components, metal and plastic, against defects in materials and workmanship for 24 months.

For Parts and Warranty Help, Contact:

Memphis Shades, Inc.
P.O. Box 429
Rossville, TN 38066
(901) 853 0293
Visit us on the web at www.memphisshades.com or you can also reach us by email:
customerservice@memphisshades.com

Part No. 2321-0280

Mounting Kit, black
Sportshield
Metric narrow

2. Mounting Instructions, continued

Note: This is a universal mounting kit, additional spacers and bolts have been included. Some applications may require the use of these spacers and bolts. Replace screw and stainless washer with longer screw and thicker washer. (Fig 3)

Note: This is a detachable windshield, ***ALWAYS* make sure the Locking Mechanism is Fully Engaged after installing the windshield!**

Fig. 1

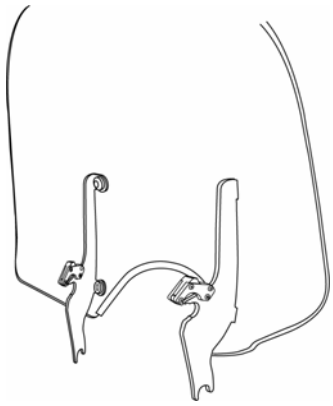

Fig. 2



Throttle side, front of bike

CORRECT

Throttle side, front of bike

INCORRECT

WARNING:
"Mounting clamps backwards will cause damage to your tank."

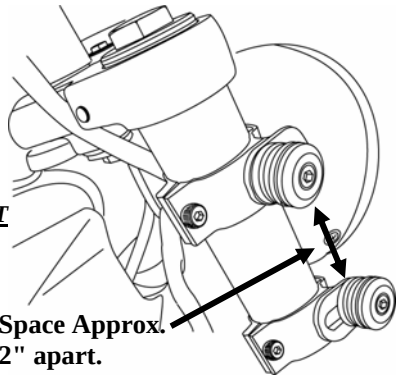

Space Approx. 2" apart.

Fig. 3

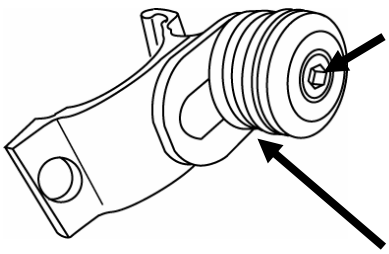

Replace this screw and stainless washer with longer screw provided and thicker washer.

Some applications may require the use of the thicker spacer included.

Fig. 4

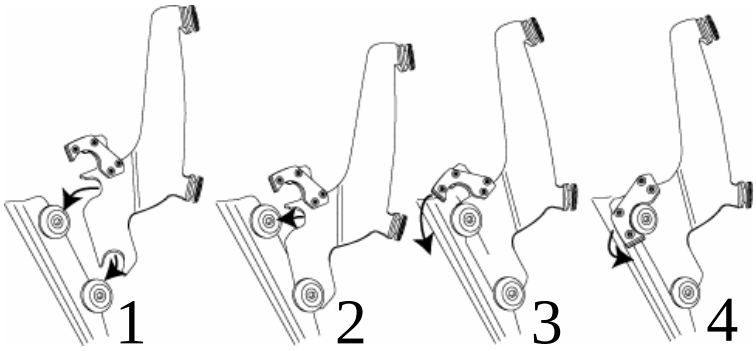
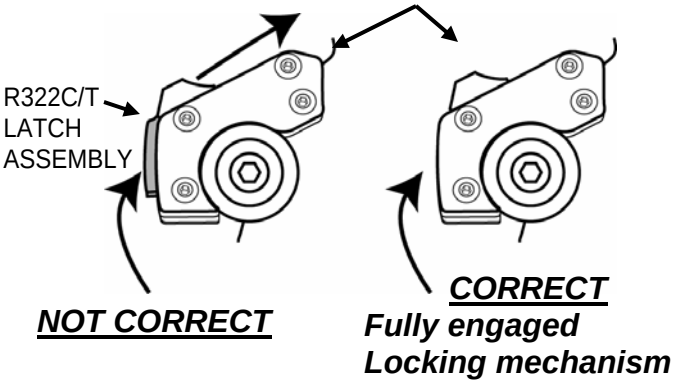
1. Place lower slot into lower bushing.
2. Rotate top slot into place.
3. Secure locking Mechanism.
4. Loosen Allen Bolt to adjust angle, then re-tighten Allen Bolt.