

MEM-9837
SUZUKI MARAUDER SPORTSHIELD
MOUNTING PLATE INSTRUCTIONS

TOOLS REQUIRED: 3/16" Allen Wrench

ALWAYS COVER THE FRONT FENDER AND GAS TANK TO PREVENT ANY POSSIBLE DAMAGE

1. Install the mounting plates on the windshield using the bolts that are pre-assembled on the mounting plates. The rubber grommets should be inserted through the holes in the windshield so that the flat round washer part of the grommet lays flat on each side of the windshield. On each plate, get both tabs started before you tighten them. (See Figure 1.1 & 1.2)

Note: - Tabs point towards each other when installed correctly.

2. Loosen the four bolts that are to hold the mounting plates to the fork clamps and remove the already installed Memphis Fats or Slims. Remove the four beveled socket washers from the fork clamps and install the 1/8" spacers in between the fork clamps and beveled socket washers using the new 1/2" screws provided. Slide the new sportshield hardware onto the fork clamps. (See figure 2)

Note: The 1/8" spacer washers must be in place in order for the hardware to mount securely.

3. Adjust the height, angle, and alignment of the shield. Carefully check gas tank clearance, and tighten all mounting bolts.
4. Place the non-used windshield in a safe storage area. Preferably in a Memphis Shades windshield storage bag. Storage bag for Fats/Slims part #MEM0980, Storage bag for Sportshields part #MEM0985.

WARNING: This is a quick disconnect kit. Always tighten down all mounting bolts after removing or installing the windshield every time.

Fig. 1.1 Left side plate


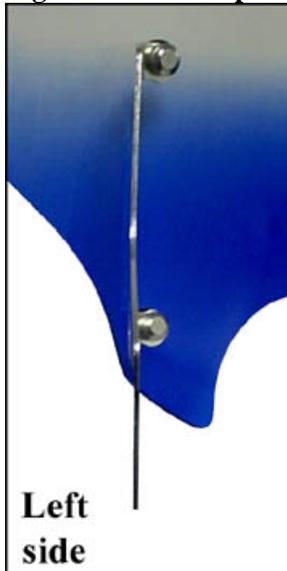


Fig. 1.2 Right side plate



Fig.2 Shows mounting of plates

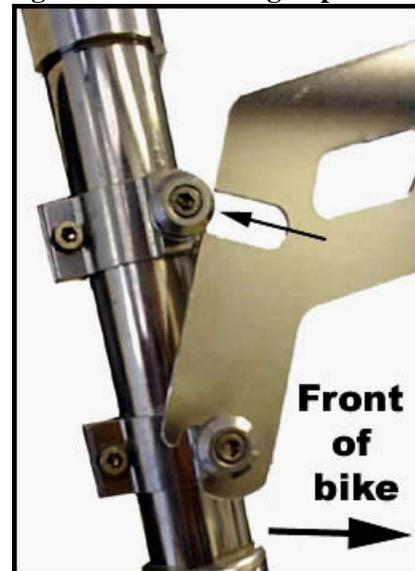

Care and Cleaning

Never use any Petroleum based chemicals, or cleaning agents with ammonia.

To clean your windshield, use only warm water and a mild, non-abrasive, dishwashing liquid. Use a soft cloth such as a Cotton T-shirt or flannel cloth. To protect your windshield use NOVUS #2 to remove minor scratches, or Memphis Shades Shinola* polish specially designed for plastic, glass cleansing agents will cause severe damage to your windshield, never use any glass product. This includes Rain-X, brake fluid, acetone, and gasoline.

**MEM 9837 MOUNTING KIT
MARAUDER SPORTSHIELD**

PART #	DESCRIPTION	QTY.
M837	Mounting Instructions/Parts List	1
M1021	Left Mounting Plate	1
M1022	Right Mounting Plate	1
M504	Socket Shoulder Washer	4
M505	Button Nut	4
M543	Santoprene Grommet	4
M559	1/8" x 3/4" Beveled Spacer Washer	4
M302	1/4" – 20 x 1/2" SS Socket Head Cap Screw	8

Memphis Shades warrants all product components, metal and plastic,
against defects in materials and workmanship for 24 months.

FOR PARTS AND WARRANTY HELP, CONTACT:

MEMPHIS SHADES
P. O. Box 429
Rossville, TN 38066
(901) 853-0293

Visit us on the web at www.memphisshades.com or
you can also reach us at
customerservice@memphisshades.com

MEM9837 11-14-07
