Mounting Suggestions
2010 – 2013
Victory Cross Country®
Sissy Bar Pad

Hardware included:	(4) 6mm x 15mm button-head Allen screw with washer Powder-coated U-bracket

Removal of Stock Sissy Bar Pad Cover & Foam

1. Unhook the Velcro on the cover and slide the cover up and off the foam.
2. With a 4mm Allen wrench, remove the 4 Allen screws recessed into the foam.
3. Slide the foam up and off the bar.

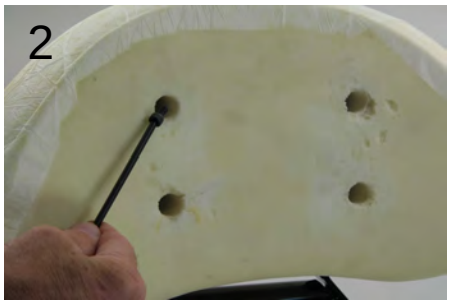

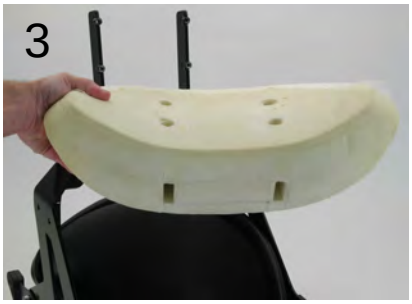

Installation of Mustang Sissy Bar Pad

1. The Mustang sissy bar pad comes with U-bracket and four 6mm button-head screws.
2. Mount the Mustang U-bracket to the Victory sissy bar using the Victory stock 4mm Allen screws.
3. Keeping the side flaps secured, open the center Velcro flap on the pad and slide the pad onto the bar.
4. Once the pad is over the Mustang U-bracket, rehook the Velcro flap. Align the holes in the pad with the threaded holes in the U-bracket.
5. Install the supplied chrome 6mm button-head Allen screws with a 4mm Allen wrench.

These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Ref: part # 76826