YOSHIMURA
RESEARCH&DEVELOPMENT OF AMERICA, INC.
5420 DANIELS STREET STE A, CHINO, CA 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198
www.yoshimura-rd.com

CHASSIS PROTECTOR SET

Kawasaki
2007-2008
ZX6R / ZX6RR

040BG146300	CHASSIS PROTECTOR SET - BLACK

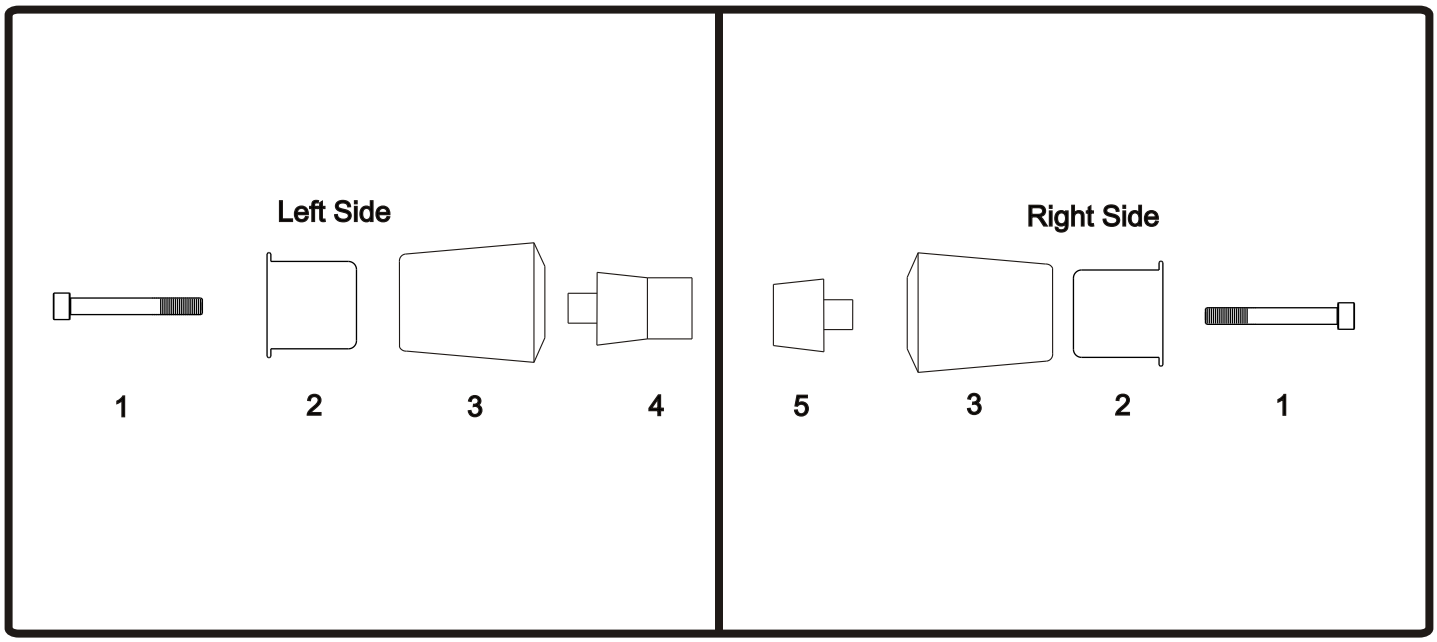

Part List:

NO.	DESCRIPTION	QTY	PART #
1	10mm x 80mm Socket Head Cap Screw	2	M10X1.25X80
2	Aluminum Insert for 1115-A05-01	2	1115-A05-01-IK
3	Chassis Protector Black	2	1115-A05-01
4	Aluminum Spacer (Left Side)	1	1361-A01-00
5	Aluminum Spacer (Right Side)	1	1361-A02-00
**	Yoshimura Sticker	2	17020C

Note: Read through all instructions before beginning installation.

Tools Needed:

Metric Socket Set
Ratchet and Extension
Metric Allen Wrench Set
Torque Wrench
Dremel Tool
Pen

Installation Steps:

1 Remove left side stock engine mount bolt. (See Fig.1 for location).

2 Install the chassis protector with the long aluminum spacer onto the left side of the motorcycle using the supplied bolt and aluminum insert. Torque bolt to 5.5 kg-m (39 lb-ft).

3 Cut out template supplied with instructions. Apply masking tape on the right side fairing where it will be trimmed to protect the surface around the trim area.

4 Place the template on the fairing and tape it so it does not move. Trace the area to be trimmed with a pen, then remove template before trimming (See Fig. 2).

5 With a dremel tool, trim the fairing along the traced line.

6 Remove the right side stock engine mount bolt. Check for proper fit of chassis protector and clearance against fairing (perform any additional trimming now if needed).

7 Install the chassis protector with the short aluminum spacer onto the right side of the motorcycle using the supplied bolt and aluminum insert. Torque bolt to 5.5 kg-m (39 lb-ft).

IMPORTANT NOTE: Install Yoshimura Chassis Protector one side at a time. Removing both engine mount bolts simultaneously may cause engine to sag or drop causing the mounting holes to be misaligned.

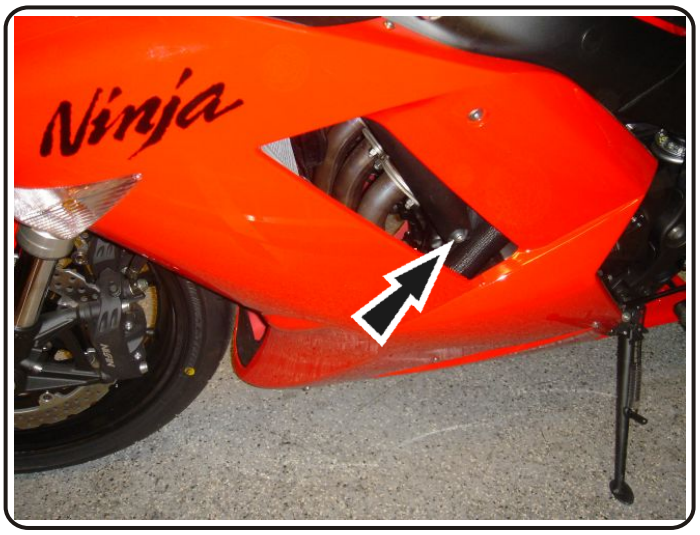

Fig. 1

Fig. 2
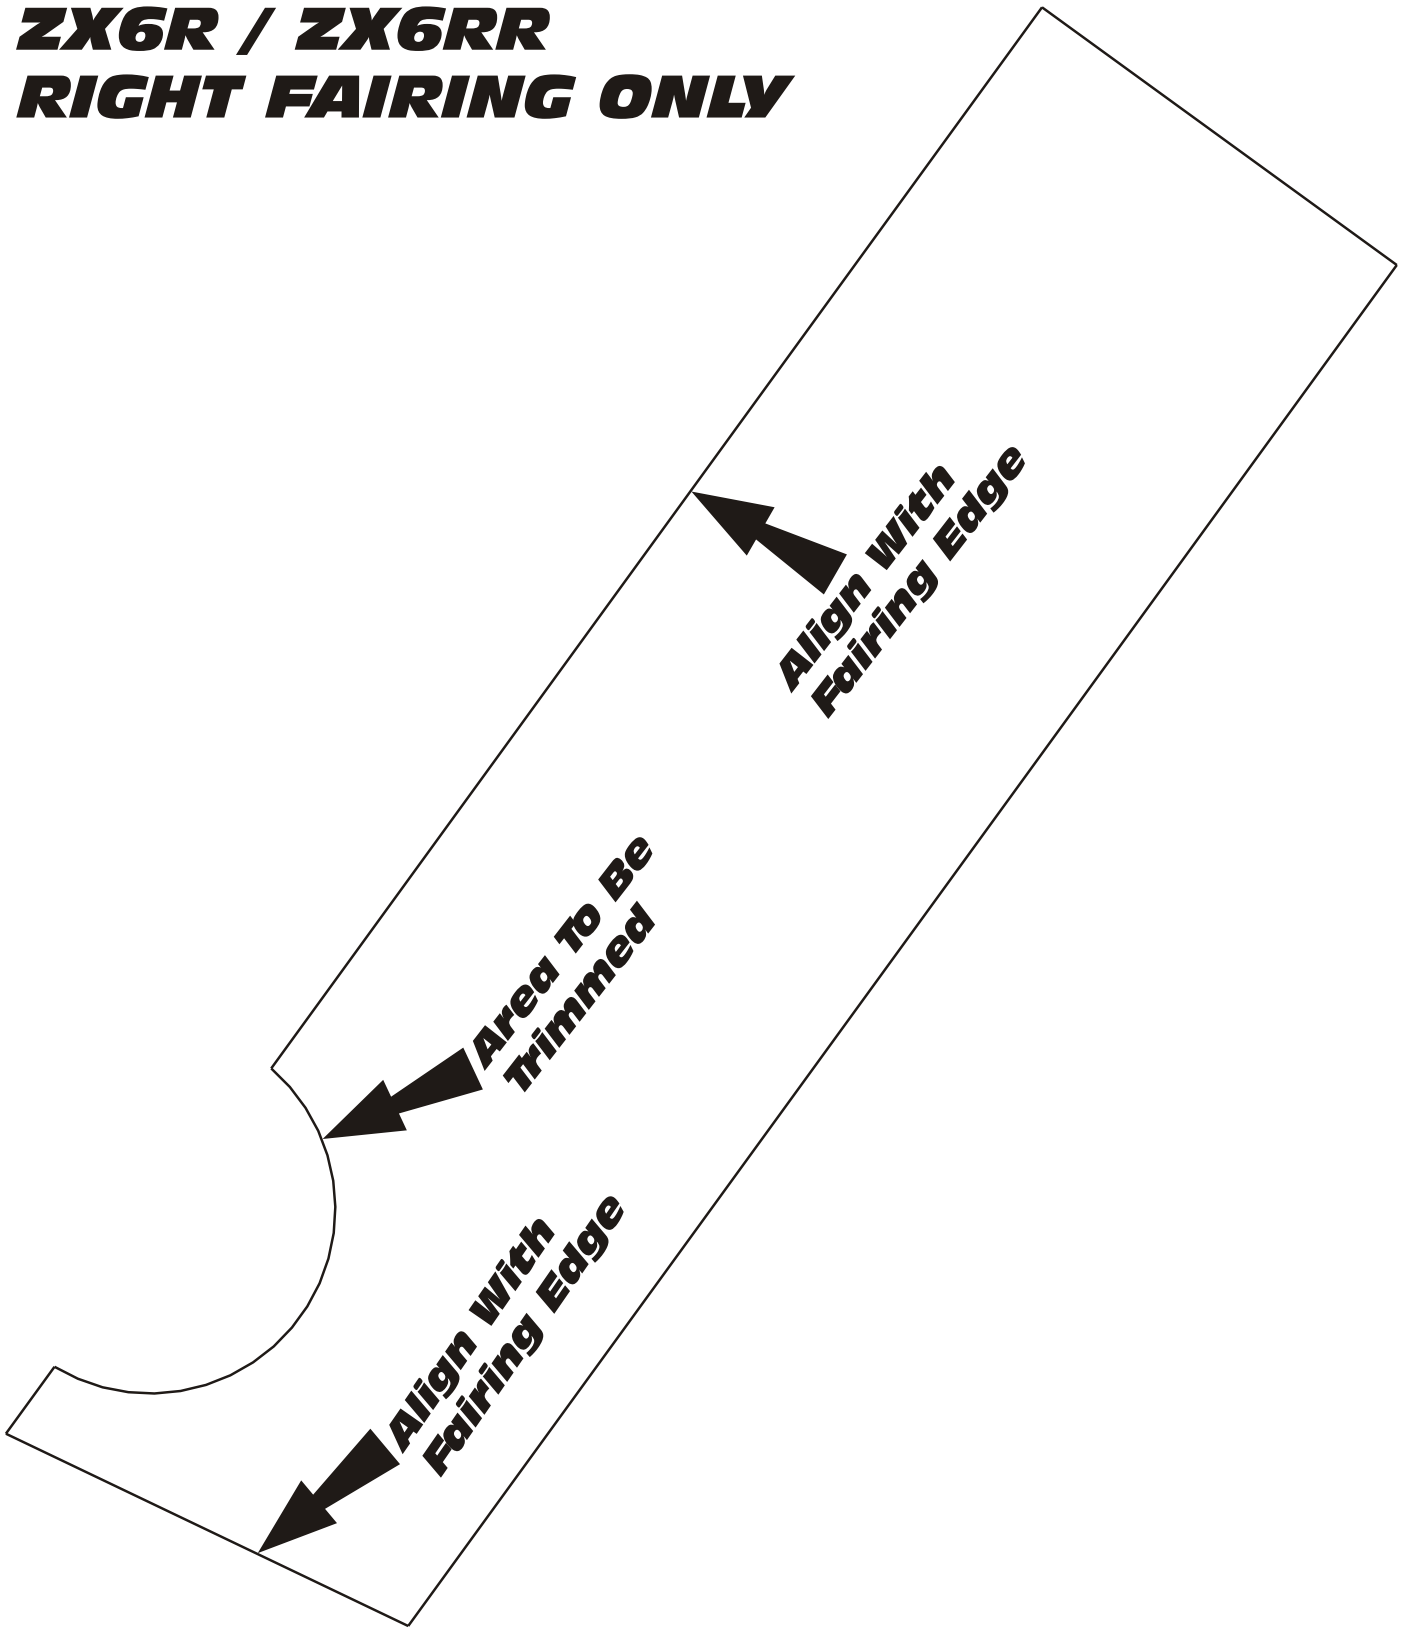
ZX6R / ZX6RR
RIGHT FAIRING ONLY